


- Sizes :** 2" to 24" (DN50 to DN600)
- Pressure:** ASME150
- Flanges:** ASME B16.5, B16.9, B16.25, B31.3
- Features:**
- Fabricated construction
 - Bolted cover c/w drain plug
 - Red oxide finish (Carbon Steel only)
 - Ø 3 mm perforated hole plate as standard
 - Full NDE (X-Ray/MPI/DPI)
 - Schedule STD wall thickness
 - Industry standard 'V'-Sieve design
- Options:**
- Special body & cover material
 - Special Gasket and Bolting Material
 - Special sieve materials / perforated plates
 - Mesh lines of sieves
 - 'W' sieve design for increased filter area
 - 'W' sieve design for reduced pressure loss
 - Alternative flange specification
 - Alternative schedule / wall thickness
 - Plugged / flanged drain connection
 - Special finish / painting / lining
 - Hydrostatic pressure testing
 - CE-Marking
- Standards:** PED 2014/68/EC
 EN 10204-3.1
 NACE MR-01-75
 ISO 15156

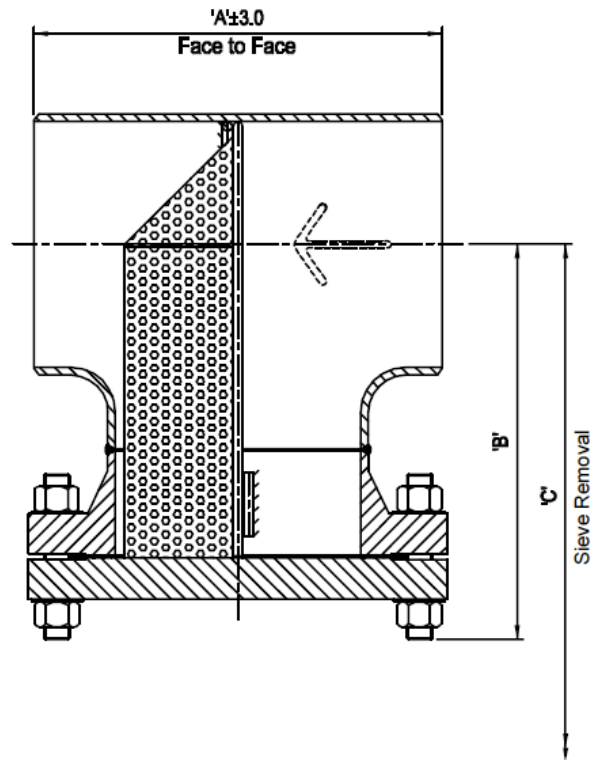

All data is subject to confirmation at the time of order. Our policy is one of continual improvement and we reserve the right to amend details without prior notice.

Size		Dimensions [mm]			Weight
mm	inch	A	B	C	appr. [kg]
50	2"	127	164	307	8,0
80	3"	172	200	381	16,0
100	4"	210	225	443	22,0
150	6"	286	277	572	39,0
200	8"	356	329	696	68,0
250	10"	432	370	799	106,0

Size		Dimensions [mm]			Weight
mm	inch	A	B	C	appr. [kg]
300	12"	508	422	926	153,0
350	14"	559	467	1021	207,0
400	16"	610	495	1101	266,0
450	18"	686	571	1200	330,0
500	20"	762	616	1300	400,0
600	24"	864	667	1500	560,0

Materials of Construction			
Item	LT Carbon Steel	Carbon Steel	Stainless Steel
Equal Tee	ASTM A420 WPL6	ASTM A234 WPB	ASTM A403 WP316
Weld Neck Flange	ASTM A350 LF2	ASTM A105	ASTM A182 F316
Strainer Cover	ASTM A350 LF2	ASTM A105	ASTM A182 F316
Drain Plug (forged)*	ASTM A350 LF2	ASTM A105N (~1.0460)	ASTM A182 F316 (~1.4404)
Cover Stud Bolts	ASTM A320 L7M – zinc plated	ASTM A193 B7M – zinc plated	
Cover Full Nuts	ASTM A194 Gr.7M – zinc plated	ASTM A194 2HM – zinc plated	
Cover Washer	Carbon steel – zinc plated		
Cover Gasket (flat)	C.N.A.F. as standard / to customer specification		
Screen (perforated)	SS 316 (~1.4401) (Ø 3 mm perforated hole plate as standard / to customer specification)		

*optionally